



Above Ground Pool Liner Installation Instructions

Need Help Installing Your Above Ground Pool Liner? Watch Our Installation Video Here:

http://www.inyopools.com/HowToPage/how_to_install_above_ground_pool_liners.aspx

ATTENTION INSTALLER: This manual contains essential information about the installation, operation, and safe use of this pool liner. Please remember to furnish this manual and all other instructional documents to the end user of this product.

WARNING: DO NOT DIVE INTO YOUR POOL. DIVING AND JUMPING IS STRICTLY FORBIDDEN AND CAN CAUSE INJURY AND PARALYSIS.

IMPORTANT: For your health and safety, this swimming pool does not have sufficient depth for diving. Do not dive. Do not allow others to dive into this swimming pool. Diving is dangerous. Prevent accidents by prohibiting horseplay and unnecessary roughness in the pool or the pool area.


RECOMMENDED ITEMS FOR PROPER INSTALLATION

- Screwdriver
- Sharp nail or ice pick
- Tamping tool
- Industrial vacuum or household vacuum with filter bag removed
- Utility knife
- 2-inch gray duct tape with non-asphaltic adhesive
- Masking tape
- Garden hose


Read Instructions completely before installing liner

- Vinyl liners are best installed in warm, sunny weather.
- Overlap liners will be held in place with plastic coping strips.
- Beaded liners are attached to the liner receiver.
- Pool bottom should be properly prepared per pool instructions prior to liner installation.
- Round and Oval liners install in similar steps. The oval liner sidewall seam will typically be aligned along the straight side of the pool. Oval liners need to be straightened and aligned properly with the shape of the pool before filling with water. Round liners also need to be evenly distributed along the edge of the sidewall. If the liner is not evenly distributed and properly aligned, wrinkles and bunching of the liner can occur.

Take top rails off and install liner
in the following order:
N, S, E, W

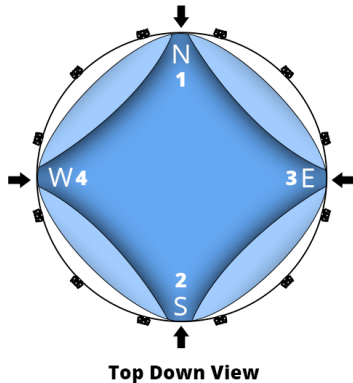

Continue installing liner
in the following order:
NE, SW, SE, NW

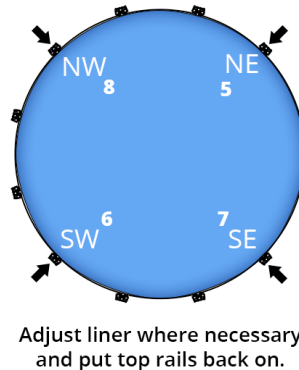

Adjust liner where necessary
and put top rails back on.

Preparing Your Pool Bottom

1. Remove any grass or weeds that might be growing within the pool area.
2. Spread a 2" layer of brick sand over the entire pool foundation area evenly inside the base rails. Use a rake to ensure the sand is level and smooth. Pack the sand to reduce foot prints. Instead of brick sand, you can use foam or padding. Cut the sheets and join them with duct tape along the entire length of each seam.
3. Using the brick sand, make a curved cove about 8" high and 8" wide all around the inside bottom of the pool wall. Pack firmly into shape. You can also purchase a wall cove that fits your size pool.


Installing Your Liner

When installing your liner, do not start at one point and work around the pool. This may cause your liner to become uneven. Instead, stagger the installation points like you would the lug nuts on your tire. This will evenly distribute the liner. Overlap liners tend to vary, however, a good rule of thumb to follow is overlap the liner 5"- 6" over the wall.

When you begin installing the liner to the pool wall, it may seem like the liner is too short. In this case, you will need to pull the liner so that the bottom seam pulls up off the ground. The seam should be pulled straight and not in the corner. Install the coping, top rail, top metal, and tracking at the same time.

1. Place the closed liner carton in the middle of the pool.
2. Open the liner **without** using a knife, box cutter, or anything sharp.
3. Unpack and unfold the liner. Spread it out in the sun to warm up
4. Inspect all seams for tears and surfaces for holes.
5. Spread your liner out. The curved seam should be centered on the cove at the base of the wall. The other seams will form straight lines across the bottom of the pool. If the seams appear to have flaps, check to see if the correct side is up.
6. Smooth out all of the wrinkles in the bottom.
7. If you have a beaded liner, refer to the "**Installing Your Beaded Liner**" section below.
8. Lift the sides of the liner and drape it over the top of the pool wall.
9. Refer to the "**Optional Step To Eliminate Wrinkles**" section or continue to the next step.
10. Start filling the pool with water. As the pool fills, work out any wrinkles and smooth the liner to the walls.

11. Remove the plastic coping around the top edge of the wall one piece at a time and adjust the liner. Keep smoothing out the wrinkles.
12. Do not install faceplates, inlets, light fixtures, etc. until water reaches 3" below each opening. Premature installation might result in the liner tearing away from the opening due to stretching as the water level increases.
13. Continue filling the pool until the desired water level.

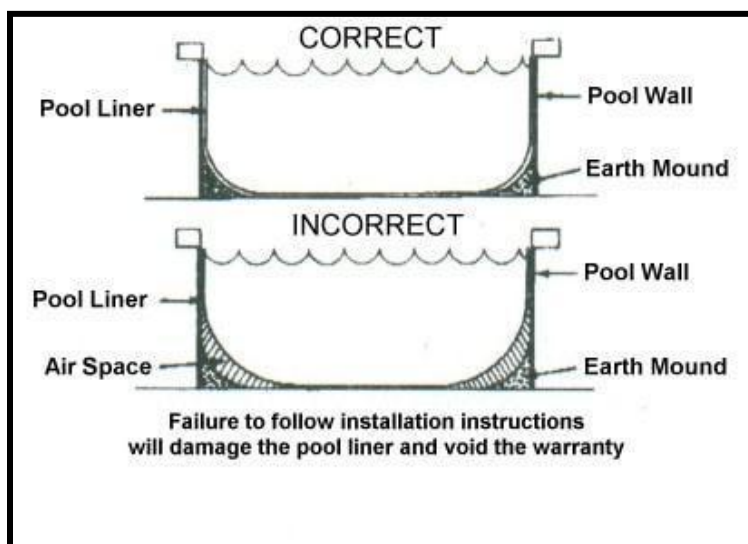

Installing Your Beaded Liner

1. Fasten the liner in place (For beaded liners only).
2. Lift the sides of the liner and insert the beaded edge into the liner retainer on THE TOP EDGE.
3. Continue to Step 8 in "Installing Your Liner."


Optional Step To Eliminate Wrinkles

1. To remove air from behind the liner, insert a vacuum cleaner hose through the skimmer hole in the pool wall behind the liner from the outside of the pool. For the most efficient air removal, seal the area around the hose and the skimmer hole using cardboard and masking tape.
2. While the vacuum is running, adjust the liner with short tugs to eliminate wrinkles. If you have trouble shifting the liner into position, shut the vacuum off for a few minutes. Then, adjust the problem area before continuing with the vacuum suction.
3. Start filling the pool with water. Continue to run the vacuum until the water level nears the top. Make sure to keep the vacuum cleaner hose above the water level at all times.
4. Continue to Step 10 in "Installing Your Liner."

Installing Your Dual Bead Liner

The Dual Bead design allows you to convert your overlap liner to an upgraded tile design. It can also be used on an existing beaded pool. Please see below for installation instructions for both types of pools.

Converting To JHook

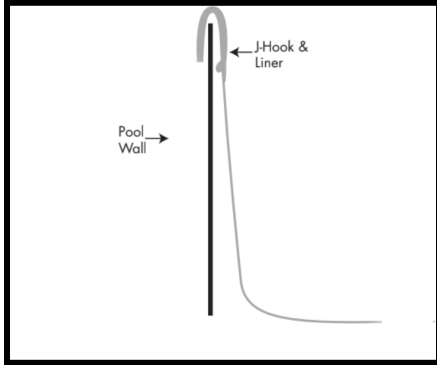


A traditional overlap liner is installed by draping the top of the liner over the pool wall and securing it with a plastic coping strip.

Your Dual Bead liner is designed with a “J-Hook” sealed to the top of the liner. To install, simply attach the “J-Hook” to the top of the pool wall as illustrated to the left.

Converting to Beaded

If you are using your Dual Bead liner for a beaded application, peel the “J-Hook” from the top of the bead. Once the “J-Hook” is removed, insert the beaded edge of the liner into the bead receiver which is attached to the top of your pool wall. Once your liner is in place, continue with Step 9.

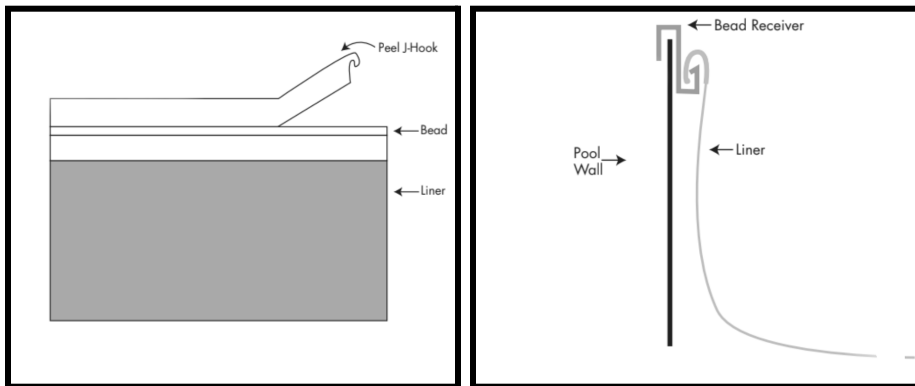

Need Help Installing Your Above Ground Pool Liner? Watch Our Installation Video Here:

http://www.inyopools.com/HowToPage/how_to_install_above_ground_pool_liners.aspx

Liner Warranty

Pureline warrants this liner to be free of defects in our workmanship. Examine your liner carefully before installing to your pool. Handle your liner carefully during inspection and installation. Manufacturers are not responsible for physical damage due to improper handling.

Pureline pool liners are warranted to be free of defects in the seams for a period Fifteen (15) seasons, from the date of purchase, or a prorated basis. Each season ends December 31st of the calendar year.

Who May Use the Warranty?

The warranty is honored only to the original purchaser. It is not honored to owners that were gifted or purchased thereafter.

What Does the Warranty Cover?

This limited warranty covers defects in workmanship causing any standard liner to separate at its seam during the warranty period. A standard liner is considered any above ground vinyl liner within the Pureline Series. This includes Beaded, Dual Bead, and Overlap liners.

What Does the Warranty NOT Cover?

In most cases, defects show up almost immediately. Physical damages (rips, tears, punctures), accidental or negligent, of any kind are not covered by this warranty. Failure to follow the product instructions that include winterization or chemical levels and natural disasters are not covered. Color fading caused by negligent storage or chemical levels are not covered.

What Remedies Do You Have?

We agree, in our sole discretion, to either repair or replace a product covered by this limited warranty. This does not include any costs related to such repair, replacement, or otherwise for freight, installation, labor charges, replacement water or chemicals.

Replacement under the warranty as follows: Original pool liner purchaser will pay the following under warranty.

First Season	No Charge
Second Season	30% of Retail Price
Third Season	40% of Retail Price
Fourth Season	50% of Retail Price
Fifth Season	60% of Retail Price
Sixth Season	70% of Retail Price
Seventh Season - Tenth Season	80% of Retail Price
11th Season - Fifteenth Season	90% of Retail Price

WARNING: DO NOT DIVE INTO YOUR POOL! DIVING AND JUMPING IS STRICTLY FORBIDDEN AND CAN CAUSE INJURY AND PARALYSIS.

IMPORTANT: For your health and safety, this swimming pool does not have sufficient depth for diving. Do not dive. Do not allow others to dive into this swimming pool. Diving is dangerous. Prevent accidents by prohibiting horseplay and unnecessary roughness in the pool or the pool area.

IMPORTANT!



DO NOT RETURN
CALL (407) 834-2200

Questions, problems, missing parts?

Before returning to your retailer, call
our consumer hotline at (407) 834-2200
Monday - Friday, 9am - 6pm (EST)