

# BADU<sup>®</sup> Pro

Variable Speed Pumps

**SPECK** X  
pumps

Welcome to the next level of replacement pump. Not only does the BADU<sup>®</sup> Pro fit directly up to the majority of the installed pump base in the U.S., it now, uniquely, talks to their automation too.

- Directly Replaces the Majority of Pumps on the Market
- Available with our Universal Automation Control Board for Seamless Communication with all Major Equipment Manufacturers.
- 1.65, 2.25 & 2.7 THP VS



BADU<sup>®</sup> Pro-V UVS (2.7THP)  
(WEF: 7.766, HHP: 1.405)



*Proudly Assembled  
in the USA*

**WE BRING WATER TO LIFE!<sup>®</sup>**

8125 Bayberry Road  
Jacksonville, FL 32256 USA  
info.usa@speck-pumps.com  
www.speck-pumps.com

Toll Free 800.223.8538  
Telephone 904.739.2626  
Facsimile 904.737.5261



# BADU® Pro UVS Series

## Self-Priming High Flow Pump



Our flagship pump, the BADU® Pro was designed with pool service pros in mind. A drop-in replacement for both the Hayward® Super Pump® and Pentair® SuperFlo®, it directly replaces the majority of pumps on the market.

### Features

- The BADU Pro pump series saves you time & money while making your life simpler.
- Easily serviceable 4-bolt design & handle
- Lid lock ring that incorporates handles. These handles provide the user with a convenient way to easily remove the lid.
- Suction and Discharge comes equipped with quick disconnect unions as well as internal threads for easy installation and maintenance.
- Every pump is wet tested before leaving the Speck factory.
- Available with Variable Speed motors in 1.65, 2.25 and 2.7 THP.
- All variable speed models are equipped with an LED light in the basket lid, for ease of maintenance.
- Most variable speed models are Energy Star compliant and qualify for all applicable utility rebates.
- Variable Speed Motors also come with digital inputs, for easy connection to automation.
- All Models are additionally available with our Universal Automation Control Board, allowing for seamless communication with all major equipment manufacturers.
- The models use our imported French 20mm seal, allowing the pump to run dry for up to an hour.
- Most models can be ordered with 1.5" or 2.0" fittings.




BADU Pro-III UVS

### Trademarks and Certifications



Select BADU Pro models are ENERGY STAR certified

### Performance Curves

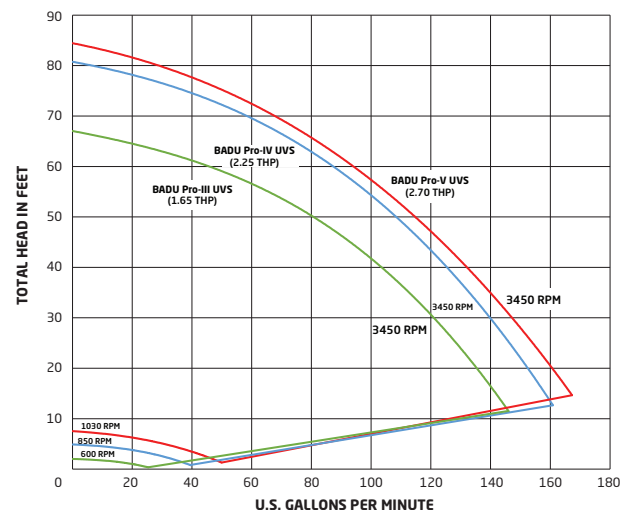

### Part Numbers

#### Variable or Multi-Speed - Energy Star

Order #	Model #	THP	WEF	HHP	Volts	Amps	Motor/Frame	Port Size
<b>Standard Models</b>								
IG385-V165T-TUS	BADU Pro-III UVS	1.65	8.9	1.009	230/115	6.8/13.6	ODP/56	2.0"
IG385-V225T-TUS	BADU Pro-IV UVS	2.25	7.616	1.354	230	9.5	ODP/56	2.0"
IG385-V270T-TUS	BADU Pro-V UVS	2.7	7.766	1.405	230	11.1	ODP/56	2.0"

#### Models with Universal Automation Control Board

IG385-V165T-TCB	BADU Pro-III UVS	1.65	8.9	1.009	230/115	6.8/13.6	ODP/56	2.0"
IG385-V225T-TCB	BADU Pro-IV UVS	2.25	7.616	1.354	230	9.5	ODP/56	2.0"
IG385-V270T-TCB	BADU Pro-V UVS	2.7	7.766	1.405	230	11.1	ODP/56	2.0"

**NOTE:** The BADU Pro-IV UVS Model is not listed on Energy Star

Hayward® & Super Pump® are trademarks and/or registered trademarks of Hayward Industries, Inc.  
Pentair® & SuperFlo® are trademarks and/or registered trademarks of Pentair Inc. and/or its affiliated companies.