



DNH^{AS}




N-3770 Kragerø
NORWAY
 Phone: (47) 35 98 56 00
 Fax: (47) 35 98 56 10
 E-mail: dnh@dnh.no
 Web-site: www.dnh.no

DNH WW Ltd. Phone:.....(44) 1908 275 000
England Fax:.....(44) 1908 275 100
 E-mail:..... dnh@dnh.co.uk
DNH Phone:.....(33) 1 5380 0276
France Fax:.....(33) 1 4588 1594
 E-mail:.....etienne@dnh.no


DNH GmbH Phone:.....(49) 040 6569 30-0
Germany Fax:.....(49) 040 6569 30-30
 E-mail:..... dnh@dnh.de
DNH Phone:.....(1) 484 494 5790
Speakers Inc. Fax:.....(1) 484 494 5793
USA E-mail:..... dnh@dnhspeakers.com

AQUA-30

ISO 9001 CERTIFIED

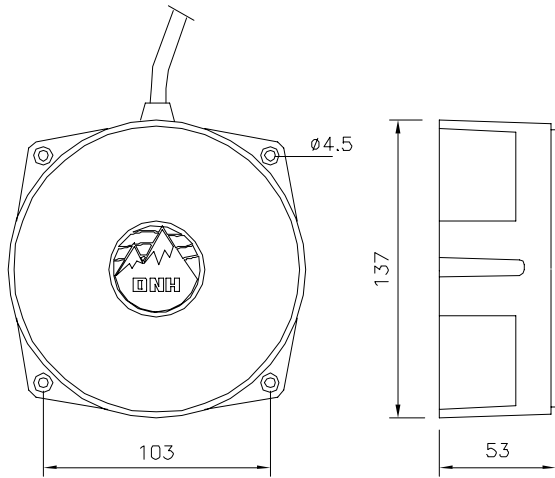

Sound pressure levels at different frequencies at 1W/1m
1/3 octave pink noise.

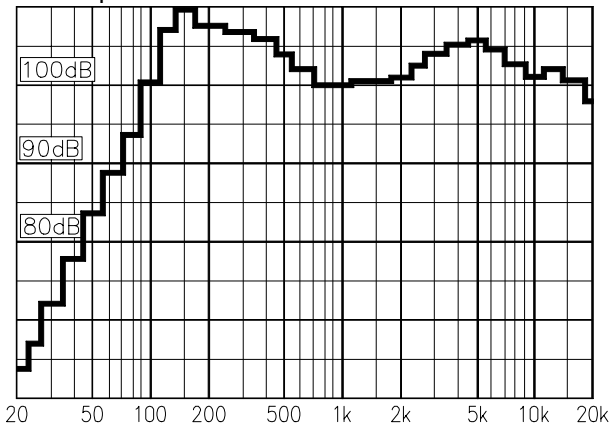

Material / Color ABS / NCS 1070-B, (Blue)
 Mounting 4 screws
 Termination Cable, 5 m
 Weight 2,2 kg
 IP-rating 68
 Max. / min. amb. temp 90°C / -20°C
 Standard version 8Ω
 Rated / max. power 20 W / 30 W
 SPL 1W/1m (submerged) 105 dB
 SPL rated power 118 dB
 Effective freq. Range (submerged) 80 – 20000 Hz
 Dispersion (-6dB) 1kHz / 4kHz 180° / 180°
 Directivity factor, Q
 Options Impedance, color, label

Installation, Operation and Maintenance Procedures

- Use 4 screws for mounting on wall, alternative flush mounting.
- When mounting with optional bracket, use the slit on each side to connect the bracket to the loudspeaker.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Cable termination code: Green/yellow: Ground Brown: (+). Blue: (-)
- Please exercise care when installing submerged. This loudspeaker generates very high sound pressures even when driven at low power.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

