

JE-3000T
HEAT PUMP



Jandy®
Pro Series
by ZODIAC®

JE 3000T
HEAT PUMP

Premium
Performance
to Heat or Chill
Your Pool



JE-3000T HEAT PUMP



Energy efficient pool and spa heating

The JE3000T is the most advanced heat pump line available. By absorbing free heat from the air and transferring it to the water, JE3000T heat pumps make the heating process efficient, ecological, and most of all, cost effective. And, with the JE3000TR reversing models, you can even cool your pool during the hot summer months with the innovative Chill mode.

» Optional chiller/hot gas defrost.

Chill your pool during hot summer nights.

» Ultra Efficient

Featuring a premium titanium heat exchanger, JE Heat Pumps provide superior hydraulic flow for maximum energy savings.



» Superior Control

Dual thermostats (pool/spa).

Features advanced digital control to enable self diagnostics, multilingual capability, and an auto-heat feature, when used in conjunction with Aqualink® control systems, to maintain your pool's temperature automatically and efficiently 24 hours per day.

JE Series Heat Pumps are iAquaLink™ compatible so you can adjust the temperature of your pool or spa from your smart-phone, tablet, or other web-enabled device. (purchased separately)

» Versa Plumb® Ready


All JE Heat Pumps are Versa Plumb ready, allowing you to achieve 50% more hydraulic efficiency for maximum energy savings.

» Versatile

Also available: JE1500T (70,000 BTU)*, JE2000T (96,000 BTU)*, and JE2500T (110,000 BTU)*. 3 phase models also available.

» Environmentally friendly (410A refrigerant)

DIMENSIONS

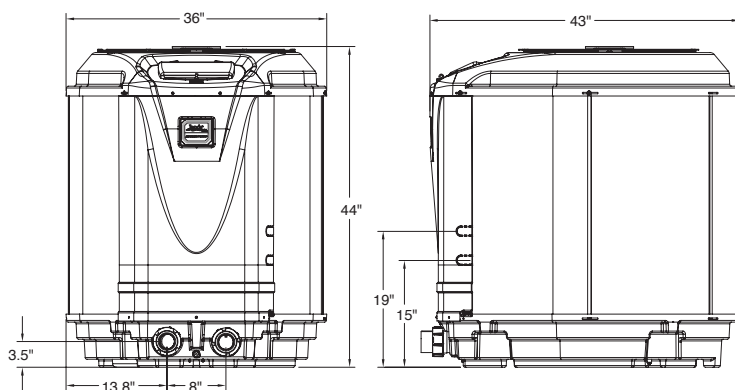

SPECIFICATIONS

| | JE3000T | JE3000TR | JE3000T3 | JE3000TR3 |
|--|--------------------|--------------------|--------------------|--------------------|
| Output* (BTUs) | 132,000 | 130,000 | 132,000 | 130,000 |
| Input* (kW) | 6.34 | 6.34 | 6.34 | 6.34 |
| COP* | 6.1 | 6.0 | 6.1 | 6.0 |
| Output** (BTUs) | 127,000 | 127,000 | 127,000 | 127,000 |
| COP** | 6.0 | 5.9 | 6 | 5.9 |
| Output*** (BTUs) | 86,000 | 86,000 | 86,000 | 86,000 |
| COP *** | 4.2 | 4 | 4.2 | 4 |
| Voltage | 230V/60Hz | 230V/60Hz | 208/230V/60Hz/3 | 208/230V/60Hz/3 |
| Minimum Circuit Ampacity | 41.81 | 41.81 | 33.00 | 33.00 |
| Max Over Current Protection**** | 60 | 60 | 50 | 50 |
| LRA | 185 | 185 | 164 | 164 |
| RLA | 32.05 | 32.05 | 25.00 | 25.00 |
| Compressor | Scroll | Scroll | Scroll | Scroll |
| Heat Exchanger | Titanium High Flow | Titanium High Flow | Titanium High Flow | Titanium High Flow |
| Optimal Water Flow (GPH) | 57 | 57 | 57 | 57 |
| Minimum Water Flow (GPH) | 20 | 20 | 20 | 20 |
| Maximum Water Flow (GPH) | 70 | 70 | 70 | 70 |
| Weight (lbs.) | 228 | 230 | 228 | 230 |

* Rated in accordance with AHRI Standard 1160; Test Conditions: 80°F Air, 80% RH, 80°F Water

** Rated in accordance with AHRI Standard 1160; Test Conditions: 80°F Air, 63% RH, 80°F Water

*** Rated in accordance with AHRI Standard 1160; Test Conditions: 50°F Air, 63% RH, 80°F Water

**** Max Over Current Protection refers to the maximum breaker size allowed. If this value is not a standard breaker size, use the next smallest standard breaker size. The breaker size must not be smaller than the Minimum Circuit Ampacity value

ZODIAC® FAMILY OF BRANDS | Heritage of Excellence

Zodiac Pool Systems, Inc.
2620 Commerce Way, Vista, CA 92081
1.800.822.7933 | www.Jandy.com

Zodiac Pool Systems Canada, Inc.
2115 South Service Road West, Unit #3, Oakville, ON L6L 5W2
1.888.647.4004 | www.ZodiacPoolSystems.ca