

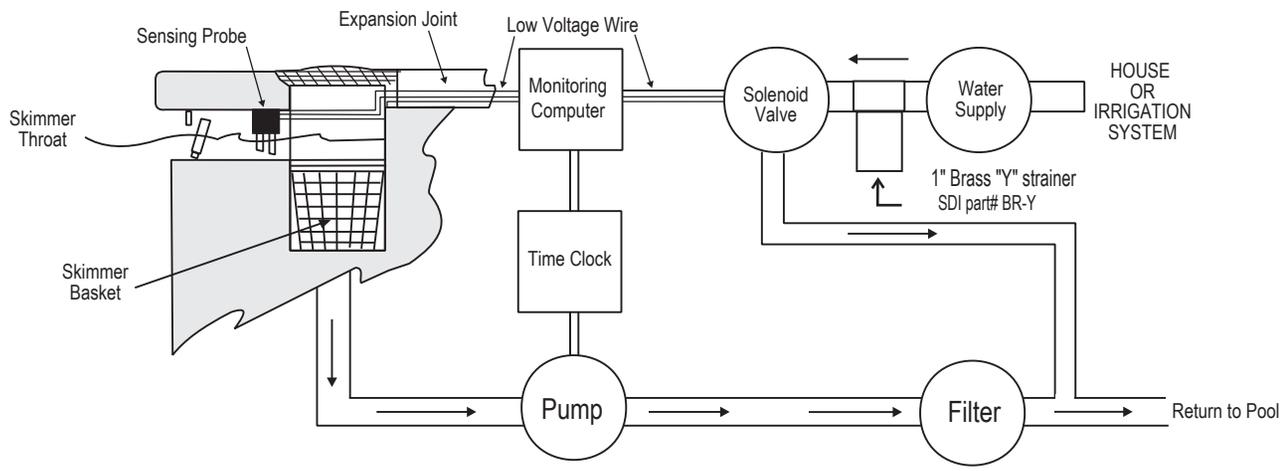
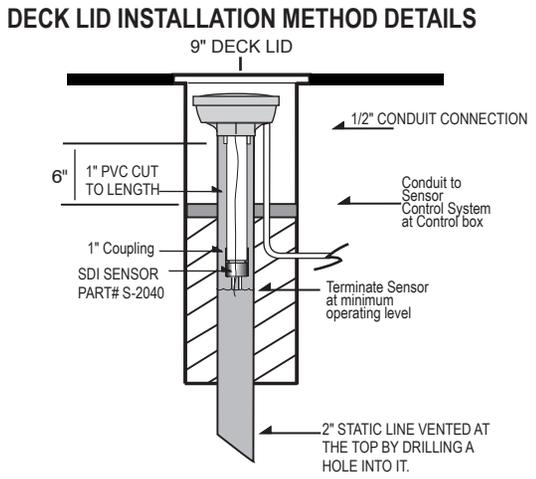
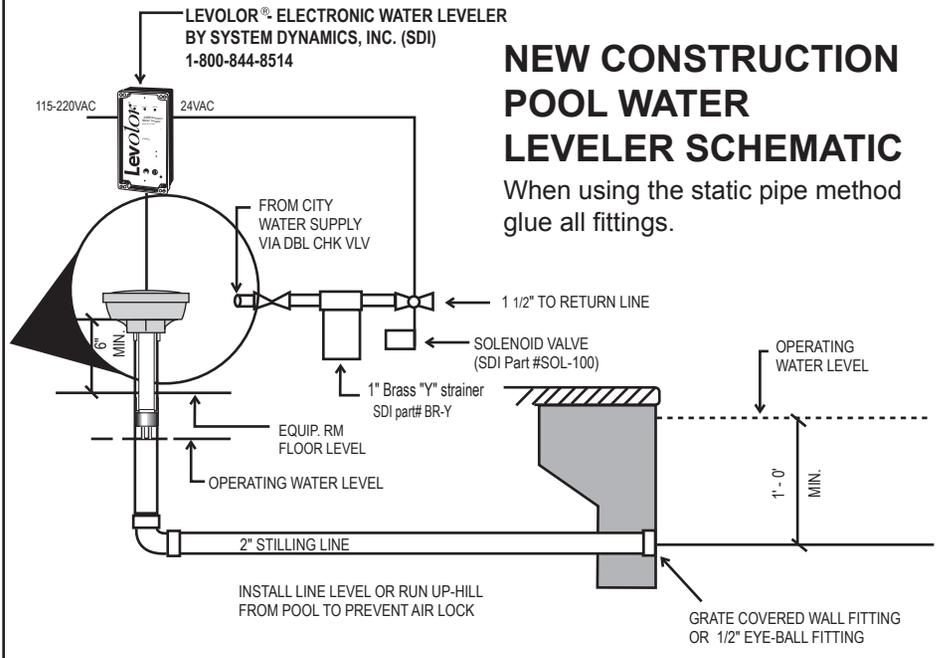


# Electronic Water Level Management Systems

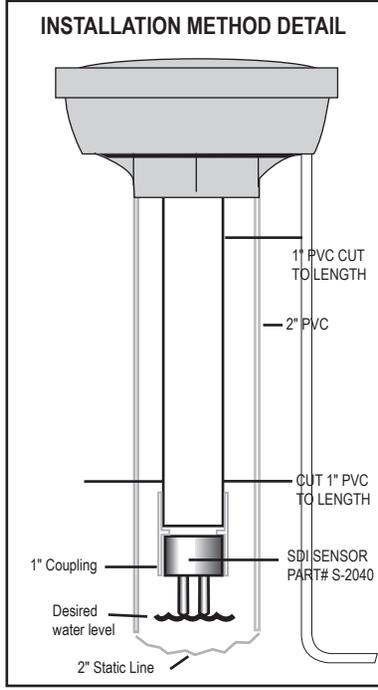

## EXISTING INSTALLATION DIAGRAM

A 24VAC solenoid valve will provide water from a supply line to the pool or spa. Installing the supply line either before or after the filter at the equipment pad is acceptable or a dedicated line back to the pool. A 3/4 inch valve is the minimum recommended, and of course, an anti-siphon valve will provide inexpensive insurance against accidental draining of the pool. Always use an in-line strainer which can be purchased from SDI (part# BR-Y).

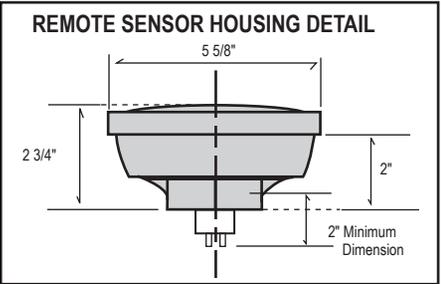

Parts supplied with S-2040. Sensor includes: Sensor w/50 ft. - 200 ft. of wire (do not splice wires) Remote Sensor Housing (RSH).